



## CULTI PACK SEEDER



### POWER TILLER MODELS

### TRACTOR MOUNTED MODELS

- \*\* TWO MODELS AVAILABLE
- \*\* HIGHLY MANOEUVRABLE
- \*\* FOLD DOWN REAR FOOT PLATE EASES OPERATOR FATIGUE
- \*\* ELIMINATES THE PROBLEM OF TYRE MARKS ON THE SURFACE
- \*\* SEEDING OUTPUT OF UP TO 2 ACRES PER HOUR

- \*\* FOUR MODELS AVAILABLE
- \*\* EQUIPPED WITH WHEEL TRACK ERADICATOR TINES
- \*\* ROBUST CONSTRUCTION WITH 3 POINT LINKAGE MOUNTING
- \*\* SEEDING OUTPUT OF UP TO 40 ACRES PER DAY

- \* ACCURATE SEEDING VARIABLE FROM 5g-50g PER SQUARE METRE
- \* STAINLESS STEEL SEED HOPPER BOTTOM
- \* IDEAL SEEDERS TO FOLLOW UP AFTER STONEBURIERS OR STONERAKES

*Shaping the Future*



## CULTI PACK SEEDER



### POWER TILLER MODELS

### TRACTOR MOUNTED MODELS

- \*\* TWO MODELS AVAILABLE
- \*\* HIGHLY MANOEUVRABLE
- \*\* FOLD DOWN REAR FOOT PLATE EASES OPERATOR FATIGUE
- \*\* ELIMINATES THE PROBLEM OF TYRE MARKS ON THE SURFACE
- \*\* SEEDING OUTPUT OF UP TO 2 ACRES PER HOUR

- \*\* FOUR MODELS AVAILABLE
- \*\* EQUIPPED WITH WHEEL TRACK ERADICATOR TINES
- \*\* ROBUST CONSTRUCTION WITH 3 POINT LINKAGE MOUNTING
- \*\* SEEDING OUTPUT OF UP TO 40 ACRES PER DAY

- \* ACCURATE SEEDING VARIABLE FROM 5g-50g PER SQUARE METRE
- \* STAINLESS STEEL SEED HOPPER BOTTOM
- \* IDEAL SEEDERS TO FOLLOW UP AFTER STONEBURIERS OR STONERAKES

*Shaping the Future*



The BLEC range of Culti Pack Seeders are based on a proven method of seed incorporation by long life notched cast ring rollers designed for the accurate seeding of small and large areas, ranging from private gardens to golf courses. All models are capable of high work rates.

The seeding method is based on a proven principle - the large FRONT NOTCHED RING ROLLERS crush lumps, level the soil to create a firm surface and also produce small pockets in the soil ready to accept the grass seed, which is spread the full width of the worked area (not drilled into lines). The rear set of rollers split the shallow ridges formed by the front rollers - incorporating the seeds evenly in the top ½” (12mm) soil. Surface disturbance is kept to a minimum.


The seed hopper is made of a strong durable construction fitted with stainless steel bottom sections with precision apertures set in them. Steel agitator rotors mounted in the hopper bottom are ground driven from the notched rolls. Seed is mixed and fed through the adjustable outlets which are controlled by a single lever. A graduated scale allows the correct seed to be obtained. A combined spreader chute and wind deflector is mounted under the hopper.

The calibration of individual seed mixes is easily carried out by the use of a tray supplied with the machine.



DOUBLE DRIVE MODEL

This model is equipped with a pto driven hydraulic system which separately powers the rear roll of the seeder unit - a flow control valve allows an infinite range of speeds to match up with the front roll drive.

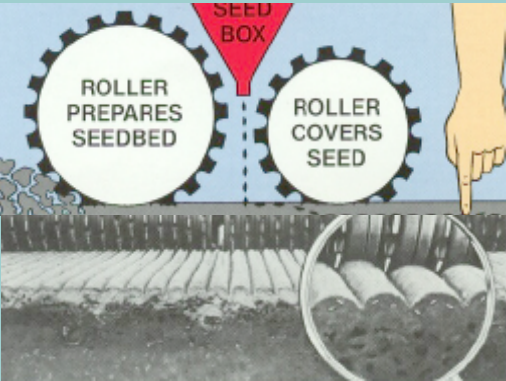

TRACTOR MOUNTED MODELS

These are fitted with a heavy duty 3 point linkage frame. A row of spring tines are mounted at the front for pre-raking and the eradication of tyre marks. The rear notched roller is mounted on floating arms for working on contours. Scraper kits are available as an option.

MODEL	CP36	CP42	DD42	TM5	TM6	TM8	TM10
SEEDING WIDTH	91cm (36")	1.07m (42")	1.07m (42")	1.37m (54")	1.83m (72")	2.44m (96")	3.05m (120")
POWER REQUIRED	5.8hp power tiller	5.8hp power tiller	5.8hp power tiller	18-28hp	20-45hp	45-90hp	55-100hp
CAST NOTCHED RING DIA.	Front 40cm(16") Rear 28cm (11")	Front 40cm(16") Rear 40cm (16")	Front 40cm (16") Rear 40cm (16")	Front 28cm (11") Rear 23cm (9")	Front 28cm (11") Rear 23cm (9")	Front 40cm (16") Rear 28cm (11")	Front 40cm (16") Rear 28cm (11")
SEED RATES	5-50gm <sup>2</sup> 0.2-1.75oz	5-50gm <sup>2</sup> 0.2-1.75oz	5-50gm <sup>2</sup> 0.2-1.75oz	5-50gm <sup>2</sup> 0.2-1.75oz	5-50gm <sup>2</sup> 0.2-1.75oz	5-50gm <sup>2</sup> 0.2-1.75oz	5-50gm <sup>2</sup> 0.2-1.75oz
HOPPER CAPACITY	1.8 cu. ft 17kg (37 lbs)	3 cu. ft 28kg (61 lbs)	3 cu. ft 28kg (61 lbs)	4 cu.ft 37kg (80 lbs)	5.3 cu. ft 50kg (112 lbs)	12 cu. ft 113kg (250 lbs)	15 cu. ft 141kg (311 lbs)
MAX OUTPUT	1.50 acres (0.6 hect) per hour	2.25 acres (0.8 hect) per hour	2.25 acres (0.8 hect) per hour	2.25 acres (0.8 hect) per hour	3 acres (1.2 hect) per hour	4 acres (1.6 hect) per hour	5 acres (2 hect) per hour
BOTTOM APERTURE SECTIONS	Stainless steel 2- piece mated. All models	Stainless steel 2- piece mated. All models	Stainless steel 2- piece mated. All models	Stainless steel 2- piece mated. All models	Stainless steel 2- piece mated. All models	Stainless steel 2- piece mated. All models	Stainless steel 2- piece mated. All models
SCRAPER KITS	Standard	Standard	Standard	Optional	Optional	Optional	Optional
WEIGHT	280kg (616 lbs) (Excluding power tiller)	330kg (726 lbs) (Excluding power tiller)	363kg (799 lbs) (Excluding power tiller)	500kg (1102 lbs)	650kg (1433 lbs)	950kg (2095lbs)	1150kg (2536 lbs)
SHIPPING SIZE EXCLUDING POWER TILLER	1.07m wide (42") 64cm high (25") 87cm long (34")	1.25m wide (49") 90cm high (35") 80cm long (31")	1.25m wide (49") 90cm high (35") 1.2m long (47")	-	-	-	-

**BLEC** LANDSCAPING EQUIPMENT CO LTD  
GLOBAL CENTRE  
SPALDING ROAD  
DEEPING ST JAMES  
PETERBOROUGH  
PE6 8SD  
ENGLAND  
Tel: 01778 346222  
Fax: 01778 346777  
Email: sales@blec.co.uk  
Website: www.blec.co.uk

DEALERS STAMP

The BLEC range of Culti Pack Seeders are based on a proven method of seed incorporation by long life notched cast ring rollers designed for the accurate seeding of small and large areas, ranging from private gardens to golf courses. All models are capable of high work rates.

The seeding method is based on a proven principle - the large FRONT NOTCHED RING ROLLERS crush lumps, level the soil to create a firm surface and also produce small pockets in the soil ready to accept the grass seed, which is spread the full width of the worked area (not drilled into lines). The rear set of rollers split the shallow ridges formed by the front rollers - incorporating the seeds evenly in the top ½” (12mm) soil. Surface disturbance is kept to a minimum.


The seed hopper is made of a strong durable construction fitted with stainless steel bottom sections with precision apertures set in them. Steel agitator rotors mounted in the hopper bottom are ground driven from the notched rolls. Seed is mixed and fed through the adjustable outlets which are controlled by a single lever. A graduated scale allows the correct seed to be obtained. A combined spreader chute and wind deflector is mounted under the hopper.

The calibration of individual seed mixes is easily carried out by the use of a tray supplied with the machine.



DOUBLE DRIVE MODEL

This model is equipped with a pto driven hydraulic system which separately powers the rear roll of the seeder unit - a flow control valve allows an infinite range of speeds to match up with the front roll drive.

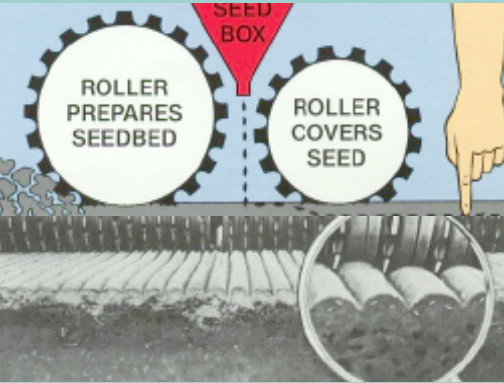

TRACTOR MOUNTED MODELS

These are fitted with a heavy duty 3 point linkage frame. A row of spring tines are mounted at the front for pre-raking and the eradication of tyre marks. The rear notched roller is mounted on floating arms for working on contours. Scraper kits are available as an option.

MODEL	CP36	CP42	DD42	TM5	TM6	TM8	TM10
SEEDING WIDTH	91cm (36")	1.07m (42")	1.07m (42")	1.37m (54")	1.83m (72")	2.44m (96")	3.05m (120")
POWER REQUIRED	5.8hp power tiller	5.8hp power tiller	5.8hp power tiller	18-28hp	20-45hp	45-90hp	55-100hp
CAST NOTCHED RING DIA.	Front 40cm(16") Rear 28cm (11")	Front 40cm(16") Rear 40cm (16")	Front 40cm (16") Rear 40cm (16")	Front 28cm (11") Rear 23cm (9")	Front 28cm (11") Rear 23cm (9")	Front 40cm (16") Rear 28cm (11")	Front 40cm (16") Rear 28cm (11")
SEED RATES	5-50gm <sup>2</sup> 0.2-1.75oz	5-50gm <sup>2</sup> 0.2-1.75oz	5-50gm <sup>2</sup> 0.2-1.75oz	5-50gm <sup>2</sup> 0.2-1.75oz	5-50gm <sup>2</sup> 0.2-1.75oz	5-50gm <sup>2</sup> 0.2-1.75oz	5-50gm <sup>2</sup> 0.2-1.75oz
HOPPER CAPACITY	1.8 cu. ft 17kg (37 lbs)	3 cu. ft 28kg (61 lbs)	3 cu. ft 28kg (61 lbs)	4 cu.ft 37kg (80 lbs)	5.3 cu. ft 50kg (112 lbs)	12 cu. ft 113kg (250 lbs)	15 cu. ft 141kg (311 lbs)
MAX OUTPUT	1.50 acres (0.6 hect) per hour	2.25 acres (0.8 hect) per hour	2.25 acres (0.8 hect) per hour	2.25 acres (0.8 hect) per hour	3 acres (1.2 hect) per hour	4 acres (1.6 hect) per hour	5 acres (2 hect) per hour
BOTTOM APERTURE SECTIONS	Stainless steel 2- piece mated. All models	Stainless steel 2- piece mated. All models	Stainless steel 2- piece mated. All models	Stainless steel 2- piece mated. All models	Stainless steel 2- piece mated. All models	Stainless steel 2- piece mated. All models	Stainless steel 2- piece mated. All models
SCRAPER KITS	Standard	Standard	Standard	Optional	Optional	Optional	Optional
WEIGHT	280kg (616 lbs) (Excluding power tiller)	330kg (726 lbs) (Excluding power tiller)	363kg (799 lbs) (Excluding power tiller)	500kg (1102 lbs)	650kg (1433 lbs)	950kg (2095lbs)	1150kg (2536 lbs)
SHIPPING SIZE EXCLUDING POWER TILLER	1.07m wide (42") 64cm high (25") 87cm long (34")	1.25m wide (49") 90cm high (35") 80cm long (31")	1.25m wide (49") 90cm high (35") 1.2m long (47")	-	-	-	-

**BLEC** LANDSCAPING EQUIPMENT CO LTD  
GLOBAL CENTRE  
SPALDING ROAD  
DEEPING ST JAMES  
PETERBOROUGH  
PE6 8SD  
ENGLAND  
Tel: 01778 346222  
Fax: 01778 346777  
Email: sales@blec.co.uk  
Website: www.blec.co.uk

DEALERS STAMP